

ingenico

# LANE/3600

Fast, secure and compact  
PIN Pad solution



- Ensure best-in-class transaction flow with an extensive contactless zone
- Integrate easily with your retail environment thanks to its compact size and wide range of accessories such as standpole and kiosk adaptation plate
- Provide a user-friendly, compact terminal for easy self-checkout



With its compact design, the Lane/3600 fits perfectly in any retail or hospitality environment.

#### Optimized for payment

- All payment methods accepted, one easy-to-identify contactless reader.

#### Designed for an intensive use in retail

- Powerful processing to increase transaction speed
- Boosted memory (Up to 512MB RAM 256MB FLASH)
- High speed processor (Cortex A7)

#### Robust device for demanding retail environment

- Display with glass lens
- High-performance card & swipe insertion.

#### Easy integration into semi-attended kiosks


- With optimized dimension and adaptation plate.

#### Rear and fast QR code reader integrated camera

- Full-integrated 0.3MP rear camera

#### Highest security

- PCI PTS v6
- Optional PCI PTS certified privacy shield
- Detection of abnormal cable's removal to alert and up to inhibit the terminal in case of threats
- Secured lock receptacle

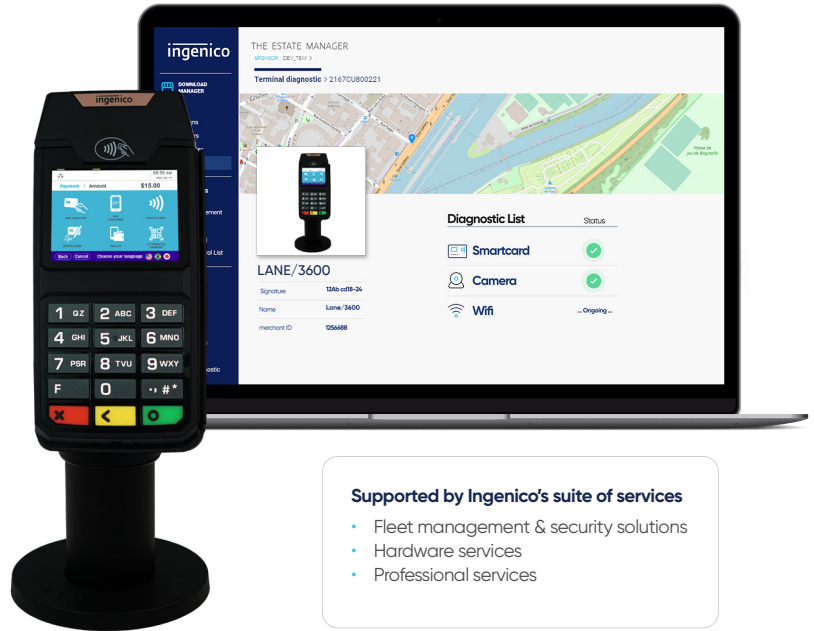

#### Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

## Specifications

|                                      |   |  |   |
|--------------------------------------|---|--|---|
| OS                                   | • Telium TETRA  | ✓  |   |
| Memory                               | • 256 MB Flash, 256 MB RAM<br>• 256 MB Flash, 512 MB RAM  | ✓<br>Option  |   |
| Processor                            | • Application & Crypto processor<br>• Cortex A7   | ✓  |   |
| SAM                                  | • SAM slots<br>• 1  | ✓  |   |
| Card readers                         | • Magnetic card reader<br>• Smart Card<br>• Contactless<br>• ISO 1/2/3 (500K reads lifespan bi-directional swiping)<br>• EMV L1 (500K reads lifespan)<br>• EMV Contactless L1 3.0 certified | ✓<br>✓<br>✓  |   |
| Integrated Camera                    | • 0,3M pixels (QR code library embedded)  | Option   |   |
| Display                              | • 2.8" backlight, glass lens, QVGA (320x240 pixels)   | ✓  |   |
| Touchscreen                          | • Capacitive<br>• Finger (1000K lifespan signature)   | Option   |   |
| Keypad                               | • Physical keys<br>• 15 keys, raised markings, backlit<br>• 4 function keys (non-touch version)<br>• Laser etched   | ✓<br>Option<br>Option  |   |
| Audio                                | • Buzzer<br>• Audio Jack<br>• Speaker<br>• Stereo<br>• Mono   | ✓<br>Option<br>Option  |   |
| Security                             | • PCI PTS<br>• Anti-removal<br>• Anti-theft<br>• PCI PTS 6 certified<br>• Active connector removal<br>• Secured lock receptacle   | ✓<br>✓<br>✓  |   |
| Terminal Connections                 | • HDMI<br>• HDMI  | ✓  |   |
| Terminal Connections via Accessories | • Ethernet<br>• USB<br>• Serial<br>• Powered USB<br>• Powered RS 232<br>• Com Box<br>• POE Box<br>• External Power Supply   | • Ethernet 10/100 base T<br>• USB Host<br>• USB Slave<br>• 1 RS232<br>• 5V and 12 V (USB retail)<br>• 12 V<br>• Power over Ethernet Option | ✓<br>✓<br>✓<br>✓<br>✓<br>Option<br>Option<br>Option |
| Stand Mounting                       | • Universal Payment Mount   | ✓  |   |
| Privacy PIN shield                   | • Standard privacy shield<br>• PCI PTS certified (factory mounted)  | Option   |   |
| Color customisation                  | • Rear casing   | Option   |   |
| Terminal Size                        | • Terminal only<br>• 167x82x40 mm (6.6x3.2x1.6")  | ✓  |   |
| Terminal Weight                      | • Terminal full option without PINshield<br>• 227g (8oz)  | ✓  |   |
| Environment                          | • Operating temperature<br>• Storage temperature<br>• Relative humidity<br>• 0 to +45°C (32°F to 113°F)<br>• -20 to +55°C (-4°F to 131°F)<br>• 85% HR at +40°C (104°F)                      | ✓<br>✓<br>✓  |   |
| Accessories                          | • Height privacy shield<br>• POE Box<br>• BITS pinshield<br>• Power over Ethernet   | Option<br>Option   |   |

